



Specification Sheet:  
**LED A-Lamps**

Indoor

## Specification Sheet: LED A-Lamps

### Lower the Cost and Improve the Environment of Your Home and Business

Revolution Lighting offers a wide variety of dimmable lamps for hospitality, commercial, multi-family and more. Our LED lighting solutions provide a better quality of light and significantly greater energy efficiency than incandescent, halogen and fluorescent lamps, reducing energy use by up to 85%. The lamps are mercury-free and 100% recyclable, making them the sustainable choice among lighting. Reduce your long-term maintenance and operational costs as well with their superior lamp life and 5-year limited warranty.

#### APPLICATIONS


- Residential
- Restaurants
- Retail
- Hotels
- Commercial buildings
- Schools
- Hospitals
- Assisted living facilities

#### BEAM ANGLE



Revolution Lighting  
Light Distribution

#### CAN DECREASE ENERGY USAGE BY



vs. Similar Incandescent  
Lamps

#### WARRANTY



Our Industry-Leading 3-Year  
Limited Warranty Guarantees  
Unsurpassed Quality

#### PRODUCT BENEFITS

##### OPERATIONAL

- 3X greater lamp life than fluorescent
- 25,000-hour lamp life reduces long-term maintenance costs
- Instant on, no warm-up time
- High-temperature silicone gasket

##### SAFETY

- Lightweight aluminum housing
- Negligible light depreciation over time
- Superior light output
- Good heat dissipation

##### SUSTAINABILITY

- Lack of UV or IR minimizes concerns with fading or discoloration
- Mercury-free, allowing for non-hazardous disposal
- 100% recyclable



7W & 9.9W LED A-Lamp

#### ORDER LOGIC (Ex. AL-7-27-A19-D)

Product Description	Lamp Wattage	CCT (K Temp)	Size	Dimmability
AL = A-Lamp	7 = 7W 9.9 = 9.9W	27 = 2700K 30 = 3000K 40 = 4000K 50 = 5000K	A19 = A19	D = Dimmable




# Specification Sheet: LED A-Lamps

## TECHNICAL DATA (Subject to change)


Catalog No.	Product SKU No.	Lamp Wattage (W)	Input Voltage (VAC)	Color Temp (K)	Lumens	Efficacy (lm/W)	CRI	Beam Angle	Rated Life (Hours)	Operating Temp. (°F)
<b>LED A-Lamps</b>										
AL-7-27-19-D	140601-400	7	120	2700	500	71.4	82	260	25,000	-13 to 104
AL-7-30-19-D	140601-401	7	120	3000	510	72.9	81	260	25,000	-13 to 104
AL-7-40-19-D	140601-403	7	120	4000	560	80.0	82	260	25,000	-13 to 104
AL-7-50-19-D	140601-405	7	120	5000	580	82.9	82	260	25,000	-13 to 104
AL-9.9-27-19-D	140603-400	9.9	120	2700	700	70.7	81	260	25,000	-13 to 104
AL-9.9-30-19-D	140603-401	9.9	120	3000	700	70.7	81	260	25,000	-13 to 104
AL-9.9-40-19-D	140603-403	9.9	120	4000	700	70.7	83	260	25,000	-13 to 104
AL-9.9-50-19-D	140603-405	9.9	120	5000	800	81.8	82	260	25,000	-13 to 104

## PHOTOMETRIC DATA

7W LED A-Lamp / 140601-400

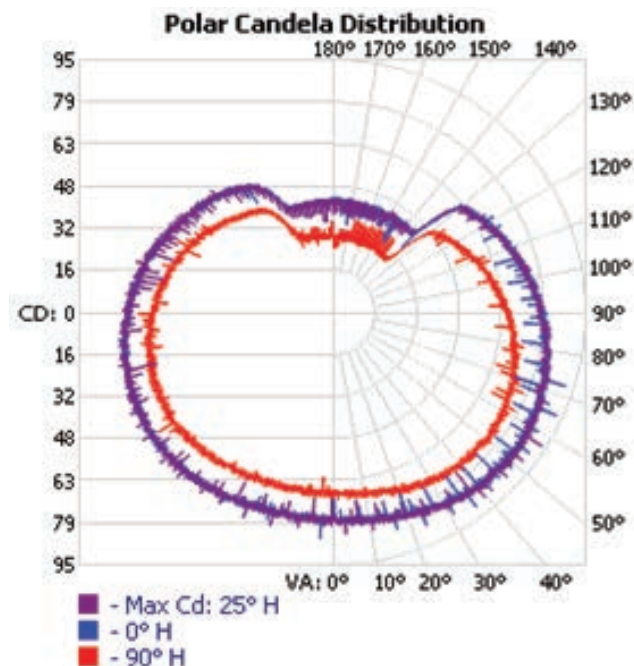

9.9W LED A-Lamp / 140603-400

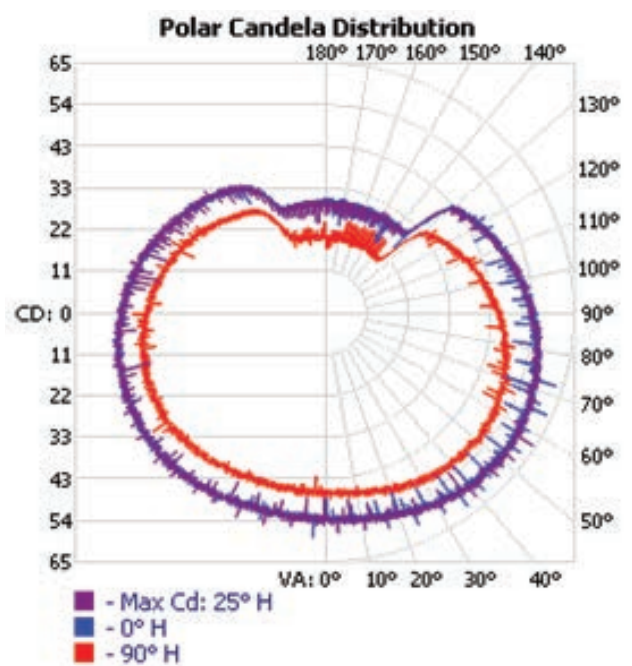

## Specification Sheet: LED A-Lamps

### SHIPPING DATA (Subject to change)

Catalog No.	Product SKU No.	Product Dimensions (in.)	Case Qty.	Case Weight (lb)	Case Dimensions (in.)	Pallet Case Qty.	Pallet Weight (lb)	Pallet Dimensions (in.)
<b>LED A-Lamps</b>								
AL-7-27-A19-D	140601-400	4.4L x 2.6 Dia.	72	19.84	15.35L x 15.35W x 10.63H	90	1,811	50.79L x 43.31W x 69.70H
AL-7-30-A19-D	140601-401	4.4L x 2.6 Dia.	72	19.84	15.35L x 15.35W x 10.63H	90	1,811	50.79L x 43.31W x 69.70H
AL-7-40-A19-D	140601-403	4.4L x 2.6 Dia.	72	19.84	15.35L x 15.35W x 10.63H	90	1,811	50.79L x 43.31W x 69.70H
AL-7-50-A19-D	140601-405	4.4L x 2.6 Dia.	72	19.84	15.35L x 15.35W x 10.63H	90	1,811	50.79L x 43.31W x 69.70H
AL-9.9-27-A19-D	140603-400	4.4L x 2.6 Dia.	72	19.84	15.35L x 15.35W x 10.63H	90	1,811	50.79L x 43.31W x 69.70H
AL-9.9-30-A19-D	140603-401	4.4L x 2.6 Dia.	72	19.84	15.35L x 15.35W x 10.63H	90	1,811	50.79L x 43.31W x 69.70H
AL-9.9-40-A19-D	140603-403	4.4L x 2.6 Dia.	72	19.84	15.35L x 15.35W x 10.63H	90	1,811	50.79L x 43.31W x 69.70H
AL-9.9-50-A19-D	140603-405	4.4L x 2.6 Dia.	72	19.84	15.35L x 15.35W x 10.63H	90	1,811	50.79L x 43.31W x 69.70H